

# Hanwha - WRR-5301/5501 - Field Replacement Unit - Power Supply


This document will demonstrate how to replace and install power supplies for the WRR-5301/5501 units.

## Step 1 - Prepare for Replacement

**⚠ Before removing the lid and performing any work inside the chassis, please ensure:**


- You have powered down the unit via the Windows interface;
- The power cable has been removed from the unit;
- You are properly grounded. Simple ways to ground yourself are:
  - Wearing an ESD strap.
  - Making contact with a grounded portion of the chassis.

## Step 2 - Contents of FRU Replacement Kit

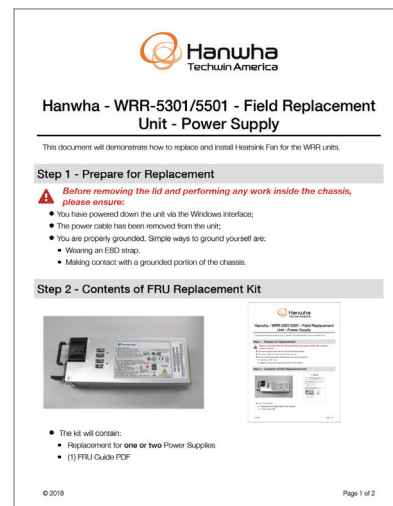

- The kit will contain:
  - Replacement for **one or two** Power Supplies
  - (1) FRU Guide PDF

## Step 3 - Remove/Install a Power Supply

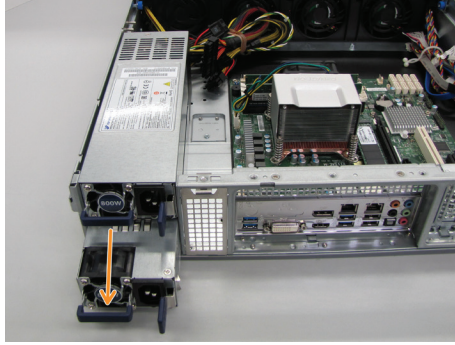

- ❗ The lid **does not** need to be removed to replace the Power Supply.
- Depress the clamp to the left (when facing the rear of the chassis).
- While the clamp is pressed, pull the power supply toward the rear of the chassis to remove it.
  - Pull the loosened power supply out of the chassis.
- To Install the Power Supply:
  - Repeat these steps in reverse.
  - ❗ Ensure the unit is fully installed by applying pressure on the unit until it **clicks** into place.
  - ❗ Further ensure the unit is fully installed by turning up the handle on the rear and giving the unit a few tugs; the PSU should not come out unless the clamp is depressed.